

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Verschueren et al.

Application No. Unassigned

Filed: December 6, 2001

Art Unit: Unassigned

Examiner: Unassigned

For: METHOD OF LITHOGRAPHIC PRINTING WITH A
REUSABLE SUBSTRATE



#3
2/4/02
m. Prudgen

CLAIM OF PRIORITY

Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

In accordance with the provisions of 35 USC 119, Applicants claim the priority of the application:

Application No. 00204376.8, filed in Europe on December 7,
2000.

A certified copy of the above-listed priority document is enclosed.

Respectfully submitted,

Matthew O. Brady, Reg. No. 44,554
One of the Attorneys for Applicant(s)
LEYDIG, VOIT & MAYER, LTD.
Two Prudential Plaza, Suite 4900
180 North Stetson
Chicago, Illinois 60601-6780
telephone: (312) 616-5600
facsimile: (312) 616-5700

Date: December 7, 2001

CERTIFICATE OF MAILING

I hereby certify that this CLAIM OF PRIORITY (along with any documents referred to as being attached or enclosed) is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" (Express Mail No. EL 643543527 US) service under 37 CFR 1.10 on the date indicated below and is addressed to Box Patent Application, Commissioner for Patents, Washington, D.C. 20231.

Date: Dec. 7, 2001

THIS PAGE BLANK (USPTO)



**Europäisches
Patentamt**

**European
Patent Office**

**Office eur péen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00204376.8

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE, 01/08/01
LA HAYE, LE

THIS PAGE BLANK (USPTO)



Eur päisches
Patentamt

European
Patent Office

Office eur péen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: 00204376.8

Anmeldetag:
Date of filing:
Date de dépôt: 07/12/00

Anmelder:
Applicant(s):
Demandeur(s):
Agfa-Gevaert
2640 Mortsel
BELGIUM

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Method of lithographic printing with a reusable substrate

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat: EP
State:
Pays:

Tag: 18/09/00
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

EPA 00203224

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

THIS PAGE BLANK (USPTO)

07. 12. 2000

[DESCRIPTION]

(40)

FIELD OF THE INVENTION

The present invention relates to a method for recycling the lithographic substrate of a printing master. More specifically the present invention comprises a step of treating the recycled substrate by supplying an aqueous solution having a pH < 7.

10 BACKGROUND OF THE INVENTION

In conventional lithographic printing, ink and an aqueous fountain solution are supplied to the surface of a printing master that contains ink accepting (oleophilic) and water-accepting (hydrophilic) areas. The inked image pattern is then transferred from the surface of the master to a blanket cylinder having a compressible surface. From the blanket cylinder the image is impressed onto paper. The master is typically a printing plate that carries an image on a dimensionally stable substrate such as an aluminium sheet. The imaged aluminium plate is secured to the plate cylinder of a printing press by a mechanical lock-up mechanism that defines positional registration between the plate and the surface of the cylinder. After the end of the press run, the mechanical lock-up system is released so that the printing plate carrying the printed image can be removed and discarded and another printing plate can be positioned and locked into place. A new print job can then be started.

Printing masters are generally obtained by the so-called computer-to-film method wherein each colour selection is transferred to graphic arts film using an image-setter. After processing, the film can be used as a mask for the exposure of an imaging material called plate precursor and after plate processing, a printing plate is obtained which can be used as a master. These steps are usually performed in dedicated exposure and processing equipment and the printing plates are then transported to the printing press and attached to the printing cylinder by press operators using a lock-up mechanism built into the cylinder itself. Although the attachment of the printing cylinder is generally a manual operation, robotic means have been developed for positioning and securing the printing plates.

In recent years the so-called computer-to-plate method has gained a lot of interest. This method, also called direct-to-plate method, bypasses the creation of film because the digital data are transferred directly to a plate precursor by means of a so-called plate-setter. On-press imaging is a direct-to-plate method (also called direct-to-press), wherein the image is exposed on the plate while said plate is mounted on the plate cylinder of a printing press. The major advantage of the latter method compared to off-press plate making is the improved registration between printing stations of a multi-colour printing press.

Two types of such on-press imaging methods are known. According to a first type, a printing plate precursor is mounted on a printing press, image-wise exposed, optionally developed, and then used as a printing master and finally removed from the press and disposed of, thus requiring a new plate material for each image. An example of this technology is the Heidelberg Model GTO-DI, manufactured by Heidelberg Druckmaschinen AG (Germany) which is described in detail in US 5,339,737. A drawback of this method is the need to use a new plate for each press run, thus increasing the cost of the printing process.

In a second type of on-press imaging systems, the same lithographic substrate is used in a plurality of press runs (hereinafter called printing cycles). In each printing cycle, a heat-sensitive or photosensitive layer is coated on the lithographic substrate to make a printing plate precursor and after image-wise exposure and optional development a printing master is obtained. After the press-run, the ink-accepting areas of the printing master are removed from the lithographic substrate in a cleaning step so that the substrate is recycled and can be used in a next cycle of coating, exposing and printing without the need to mount a new plate on the cylinder. Examples of such on-press coating and on-press imaging systems are described in e.g. US 5,188,033; US 5,713,287; EP-A 786 337 and EP-A 802 457. The latter patent application describes an apparatus comprising a printing member, means for applying a uniform coating, means for scan-wise exposing said uniform coating in accordance with an image pattern and means for developing said uniform coating to leave an image on said printing member, the image consisting of ink-accepting areas on an ink-repellent background or ink-repellent areas on an ink-accepting

background. According to a preferred embodiment, the coating comprises hydrophobic thermoplastic polymer particles in a hydrophilic binder.

5 Cleaning liquids for lithographic printing plates have been described in EP-A-00200176, EP-A-00200177 and EP-A-00200178 all filed on 18-01-2000 and DE-A-42 16 636.

The known cleaning liquids typically contain solvents which are harmful to hoses, pumps and sealings and/or require a very thorough rinsing with water because these liquids are not compatible with the
10 coating step in the next printing cycle.

In the known on-press coating methods, the cleaning of the lithographic substrate often fails because no suitable compromise can be found between the chemical reactivity of the cleaning liquid versus the ink-accepting areas which have to be removed on the one
15 hand and the required inertness of said cleaning liquid versus the fragile lithographic surface on the other hand. A typical lithographic surface is mechanically as well as chemically quite vulnerable. A lithographic surface consists generally of a micro-pore structure in order to obtain a good differentiation between the
20 spreading properties of the ink and the fountain. Anodised aluminium plates comprise a lithographic surface containing one or more metal oxides on which absorption phenomena can take place. These metal oxides are very susceptible to chemical conversion into forms that are no longer lithographically active.

25 The above mentioned micro-porosity of a lithographic surface is also highly susceptible to mechanical damage. The presence of solid particles in cleaning liquids, which is often required for efficient mechanical cleaning of the lithographic surface, results inevitably in a disturbance of the micro-structure of said surface. Because ink
30 and the coated imaging layer penetrate in the micro-pore structure, it is necessary to carry out a vigorous cleaning so as to avoid ghost images in the subsequent printing cycles, which are due to an incomplete removal of the previous image.

35

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a lithographic printing method whereby reusable printing masters

having a superior cleanliness are obtained and no ghost images occur. The above objects are obtained by the method of claim 1.


The method defined in claim 1 comprises after a cleaning step a treatment with an aqueous solution having a pH<7 whereby the ink-accepting areas of a printing master can be removed more effectively so that the substrate can be reused in a next print cycle. No ghost images and an excellent print quality are observed after several (>10) print cycles of coating, exposure, printing, cleaning and treatment with an aqueous solution having a pH<7.

Further objects of the present invention will become clear from the description hereinafter.

Preferred embodiments of the method of the present invention are defined in the dependent claims.

DETAILED DESCRIPTION OF THE INVENTION

The aqueous solution having a pH<7 used in the method of the present invention, hereinafter referred to as refreshing liquid comprises acidic compounds such as citric acid, polyacrylic acid or silica containing compounds that are capable of lowering the pH of water. Preferably the refreshing liquid comprises a compound according to formula I:




wherein X is OH, O⁻ or a polymer backbone.

The counter ion can be, depending on the pH, H or a metal such as an alkali or alkaline earth metal or a transition metal, e.g. chromium.

Suitable examples of the compound according to formula (I) are polyvinylphosphonic acid, copolymers of vinylphosphonic acid with acrylic acid and vinyl acetate, acrylamidoisobutylene phosphonic acid. Preferably the compound is phosphoric acid or a phosphate salt.

The cleaning liquid used in the method of the present invention is preferably an emulsion of an organic compound in water. The emulsion preferably comprises as organic compound a mixture of an alcohol and a cyclic compound having at least one double bond. The alcohol used is preferably an aliphatic alcoholether. Suitable examples of such aliphatic alcoholethers are: methoxypropanol, propoxyethanol, 2-butoxyethanol, propanol, 2-(propyloxy)ethanol, fenoxxyethanol, benzylalcohol, butoxypropanol, ethoxypropanol, 1-isobutoxy-2-propanol, 1-isomethoxy-2-propanol, 1-propoxy-2-propanol, diacetone alcohol, tetrahydrofurfuryl alcohol, cathechol, trimethylolpropane, ethanediol, propanediol, and butanediol. Highly preferred is 2-butoxyethanol. Suitable examples of cyclic compounds having at least one double are: toluene, xylene, propylbenzene, 3-methyl-6-isopropyl-1,4-cyclo-hexadiene, 3-(1-methylpropylidene)-cyclohexene, 6-methyl-1-(1-methylethyl)-1,3-cyclohexadiene, 4-methyl-5-(1-methylethenyl)-cyclohexene, o-mentha-4,6-diene, o-mentha-2(8),3-diene, o-mentha-1(7),4-diene, 6-methyl-1-(1-methylethenyl)-cyclohexene, 1-methyl-5-(1-methylethyl)-1,4-cyclohexadiene, isosylvestrene, 4-ethyl-3-ethylidene-cyclohexene, 1-ethyl-6-ethylidene-cyclohexene, o-mentha-3,6-diene, o-mentha-2,5-diene, o-mentha-1,4-diene, 3-methyl-4-isopropenyl-1-cyclohexene, 3-methyl-5-isopropenyl-1-cyclohexene, 2-methyl-3-propyl-1,3-cyclohexadiene, 1-methyl-6-propylidene-cyclohexene, tetranaphtalene and preferably dipentene (formula II).



(II)

The aqueous emulsion is preferably also stabilised with an emulsifying agent. Preferably the emulsifying agent is an anionic compound and/or comprises an alkylene oxide chain. Suitable examples are Akypo OP80, Akypo RO90 (both commercially available from Chem-Y), Empicol ESC70 (commercially available from Albright & Wilson), Aerosol OT (commercially available from AM Cynamid).

The cleaning liquids are capable of removing the ink remaining on the printing areas as well as the hydrophobic coating itself that gives rise to the ink-accepting properties of the printing areas.

The above cleaning liquids are very suitable for removing the ink-accepting areas from a printing master which is obtained by coating a hydrophilic substrate with a coating solution containing hydrophobic thermoplastic polymer particles and preferably also a hydrophilic binder. The imaging material thus obtained is negative-working, i.e. hydrophobic areas are formed upon exposure. These areas define the printing areas of the master. It is believed that the applied heat induces a coagulation of the hydrophobic polymer particles, thereby forming a hydrophobic phase, whereas the hydrophobic polymer particles remain unchanged in the non-heated areas. Coagulation may result from heat-induced softening or melting of the thermoplastic polymer particles.

The imaging material which is preferably used in the present invention contains a coating comprising hydrophobic thermoplastic polymer particles having an average particle size between 40 nm and 2000 nm, and more preferably between 40 nm to 200 nm, so as to improve sensitivity and throughput and to avoid scumming. Furthermore the polymer particles preferably have a coagulation temperature above 50°C and more preferably above 70°C. There is no specific upper limit to the coagulation temperature of the polymer particles, however the temperature should be sufficiently below the decomposition temperature of the polymer particles. Preferably the coagulation temperature is at least 10°C below the temperature at which the decomposition of the polymer particles occurs.

Preferred examples of thermoplastic hydrophobic polymer particles for use the present invention have a Tg above 80°C. The weight average molecular weight of the polymers may range from 5,000 to 5,000,000 g/mol. Preferably the polymer particles are selected from the group consisting of polyvinyl chloride, polyvinylidene chloride, polyesters, polyurethanes, polyacrylonitrile, polyvinyl carbazole etc., and copolymers or mixtures thereof. The most preferred examples are polystyrene and polymethylmethacrylate or copolymers thereof.

The polymer particles are present as a dispersion in the coating solution and may be prepared by the methods disclosed in US 3,476,937. Another method especially suitable for preparing an

aqueous dispersion of the thermoplastic polymer particles comprises:

- dissolving the hydrophobic thermoplastic polymer in an organic solvent which does not mix with water,
- dispersing the thus obtained solution in water or in an aqueous medium and
- removing the organic solvent by evaporation.

Suitable binders for use in the present invention are preferably hydrophilic binders such as water-soluble (co)polymers for example synthetic homo- or copolymers such as polyvinylalcohol, a poly(meth)acrylic acid, a poly(meth)acrylamide, a polyhydroxyethyl(meth)acrylate, a polyvinylmethylether or natural binders such as gelatine, a polysaccharide such as e.g. dextran, pullulan, cellulose, arabic gum, alginic acid, inuline or chemically modified inuline.

In addition, the coating solution may also contain surfactants that can be anionic, cationic, non-ionic or amphoteric. Perfluoro surfactants are preferred. Particularly preferred are non-ionic perfluoro surfactants. Said surfactants can be used alone or preferably in combination.

The coverage of the coated layer ranges preferably from 0.3 to 20 g/m², more preferably from 0.5 to 5 g/m². The amount of hydrophobic thermoplastic polymer particles contained in the coated layer is preferably between 50 and 90 % by weight and more preferably between 60 and 80 % by weight of the total weight of said layer.

The substrate used in the present invention can be a plastic support or a ceramic but is preferably a metal such as aluminium. The substrate has a hydrophilic surface and is preferably characterised by a roughness value of at least 0.2 µm, more preferably of at least 0.3 µm, e.g. electrochemically and/or mechanically grained and anodised aluminium. The substrate can be a sheet-like material such as a plate but, alternatively, the coating solution may be applied directly to the plate cylinder of a rotary printing press, said cylinder thereby acting as the substrate. The lithographic substrate can also be a seamless sleeve printing plate, obtained by e.g. soldering a plate into a cylindrical form by means of a laser. The sleeve then can be slid around the plate cylinder instead of mounting a conventional printing plate. More details on sleeves are given in "Grafisch Nieuws" , 15, 1995, page 4 to 6.

The exposure of the imaging material obtained by coating the above coating solution on the lithographic substrate can be carried out by means of direct thermal recording using e.g. a thermal head, or by irradiation with high intensity light. In the latter
5 embodiment, the heat-sensitive material preferably comprises a compound capable of converting light into heat, preferably a compound having sufficient absorption in the wavelength range of the light source used for image-wise exposure. Particularly useful
10 compounds are for example dyes and in particular infrared dyes as disclosed in EP-A 908 307 and pigments and in particular infrared pigments such as carbon black, metal carbides, borides, nitrides, carbonitrides, bronze-structured oxides and oxides structurally related to the bronze family but lacking the A component e.g. WO₂.
15 It is also possible to use conductive polymer dispersions such as polypyrrole, polyaniline or polythiophene-based conductive polymer dispersions. The lithographic performance and in particular the print endurance obtained depends i.a. on the heat-sensitivity of the imaging material. In this respect it has been found that carbon
black yields very good and favourable results.

20 Image-wise exposure in the method of the present invention is preferably an image-wise scanning exposure involving the use of a laser or L.E.D. Preferably used are lasers that operate in the infrared or near-infrared, i.e. wavelength range of 700-1500 nm. Most preferred are laser diodes emitting in the near infrared.

25 The printing method of the present invention will be further described hereinafter according to a preferred embodiment. First, a grained and anodised aluminium plate is mounted on the plate cylinder of a rotary printing press. Then, the coating solution described above is sprayed on the hydrophilic lithographic surface
30 of the plate, so as to form a continuous imaging layer. Preferred values of the spraying parameters have been defined in EP-A no. 99203064 and EP-A no. 99203065, both filed on 15th September 1999. The imaging layer is then image-wise exposed by a laser device which is integrated in the printing press e.g. as described in
35 **US-P-5 163 368** and **US-P-5 174 205** whereby the exposed areas are converted to hydrophobic ink-accepting areas while the unexposed areas remain hydrophilic. The hydrophobic areas define the printing areas of the master. Subsequently, printing is started by applying ink and a fountain solution to the printing master. In order to

dissolve and remove the non-exposed areas of the coated layer effectively, only fountain solution is preferably supplied during a few revolutions of the press (about 10), and then also ink is fed to the plate. After the press run, the ink-accepting areas are removed .
5 by supplying a cleaning liquid as described above to the imaging layer thereby obtaining a recycled substrate. Finally, the recycled substrate is treated with the above described refreshing liquid and then, a new printing cycle can be started by spraying the coating solution to the recycled substrate.

10 The cleaning step can be executed in a cleaning unit similar to the known blanket cleaning system. According to that embodiment, a cloth is preferably moistened with the cleaning liquid, contacted with the printed plate during 1 to 50, more preferably during 2 to 10 revolutions with a contacting pressure between 10^4 and 6×10^5 Pa
15 at a rotation speed in the range of 2 to 50 m/min. Afterwards the contact between the printing surface and the cleaning cloth is disrupted and the cloth is transported until a dry and clean part of the cloth is available.

The refreshing liquid can be applied in a similar way as the
20 cleaning liquid.

The cleaning liquid and the refreshing liquid can also be applied by spraying, coating or jetting the cleaning liquid or the refreshing liquid on the lithographic substrate or on the cloth. The removal of the ink-accepting areas can also be effected with
25 another absorbing medium than a cloth. Cleaning/refreshing can also be effected by combining the treatment with the cleaning liquid/refreshing liquid of the present invention with other means such as a rotating brush or by jetting water or a volatile medium such as air, a solvent or dry ice pellets. Also vacuum extraction
30 can be used during the cleaning/refreshing treatment.

All the steps of the method of the present invention are preferably performed on-press. Alternatively, the lithographic substrate can also be mounted on a drum in a dedicated coating apparatus (off-press coating) and subsequently be mounted on a plate
35 setter for image-wise exposure (off-press exposure). Then, the printing master thus obtained can be mounted on a press cylinder and printing is started by supplying ink and a fountain solution. After the press run, the plate can be cleaned and refreshed as described above, either on-press or in a dedicated cleaning/refreshing

apparatus, and the recycled substrate can then be used again in a next printing cycle.

Examples

5

Example 1: Comparative example

Preparation of the lithographic base

10 A 0.30 mm thick aluminium foil was degreased by immersing the foil in an aqueous solution containing 5 g/l of sodium hydroxide at 50°C and rinsed with demineralized water. The foil was then electrochemically grained using an alternating current in an aqueous solution containing 4 g/l of hydrochloric acid, 4 g/l of hydroboric
15 acid and 5 g/l of aluminium ions at a temperature of 35°C and a current density of 1200 A/m² to form a surface topography with an average centre-line roughness Ra of 0.5 µm.


After rinsing with demineralized water the aluminium foil was then etched with an aqueous solution containing 300 g/l of sulphuric
20 acid at 60°C for 180 seconds and rinsed with demineralized water at 25°C for 30 seconds.

The foil was subsequently subjected to anodic oxidation in an aqueous solution containing 200 g/l of sulphuric acid at a temperature of 45°C, a voltage of about 10 V and a current density of
25 150 A/m² for about 300 seconds to form an anodic oxidation film of 3.00 g/m² of Al₂O₃, then washed with demineralized water, posttreated with a solution containing polyvinylphosphonic acid and subsequently with a solution containing aluminium trichloride, rinsed with demineralized water at 20°C during 120 seconds and dried.

30

Preparation of spray solution

A 2.61 wt.% solution in water was prepared by mixing polystyrene latex, a heat absorbing compound and a hydrophilic
35 binder. After spraying and drying, the resulting layer contained 75 wt.% of the polystyrene latex, 10 wt.% of the heat absorbing compound, presented in formula (I) and 15 wt.% polyacrylic acid (Glascol E15, commercially available at N.V. Allied Colloids Belgium) as hydrophilic binder.

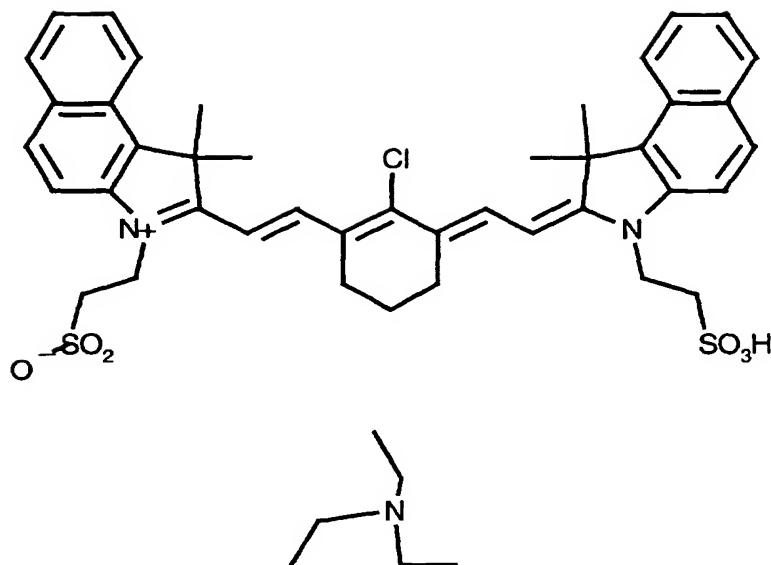

Formula (I)

5 Preparation of the heat-mode imaging element

The spray solution was sprayed on the above mentioned lithographic base. Therefore, the lithographic base was mounted on a drum, rotating at a line speed of 164 m/min. The imaging element
 10 was coated by a spray nozzle moving in transverse direction at a speed of 1.5 m/min. The spray nozzle was mounted on a distance of 80mm between nozzle and receiving substrate. The flow rate of the spray solution was set to 7 ml/min. During the spray process an air pressure of 90 psi was used on the spray head. This layer was dried
 15 on a temperature of 70°C during the spraying process and additionally during 30 s.

The spray nozzle was of the type SUJ1, an air assisted spray nozzle, commercially available from Spraying Systems Belgium, Brussels.

20

Printing step

The above mentioned heat mode imaging element was imaged in a
 25 Creo 3244™ external drum platesetter at 2400 dpi at 150 rpm with a power setting of 15.5 Watt. The imaged plates were printed on a

GT046 printing press with K+E 800 Skinnex ink, fountain (Combifix XL from Hostman-Steinberg (4 wt.%) - isopropylalcohol (10 wt.%) in water) to a run length of 5000. The print quality was evaluated.

5 Cleaning step

After printing, the plate which still contained the adhered ink was cleaned by use of a cleaner composition and a high pressure washer. In this process, the following procedure was used:

10 10 ml/m² of an emulsion of 10% W/W D-limonene (commercially available from Fluka) in water was sprayed, using a manual pressure sprayer commercially available from Premal Sprayer Devision of Precision Valve Corporation, New York.

15 After a time lapse of 30 s during which the cleaning liquid was allowed to interact with the coating, the plate was cleaned with a conventional high pressure washer, using a volume of water of 10 litre/m².

Finally, the plate was dried with pressurised air at room temperature until the plate surface seems visually dry.

20

Next cycle

The procedure of spraying, imaging, printing and cleaning was repeated. In the second cycle, the plate was imaged with a full
25 plane of a 50% screen. Afterwards, the plate cleanliness and print characteristics were evaluated.

Example 2: Comparative example

30 The same procedure as mentioned in example 1 was repeated, however the following cleaning proccedure was used:

10 ml/m² of an emulsion of 10% W/W D-limonene (commercially available from Fluka) in water was sprayed, using a manual pressure sprayer commercially available from Premal Sprayer Devision of
35 Precision Valve Corporation, New York.

After a time lapse of 30 s during which the cleaning liquid was allowed to interact with the coating, the plate was cleaned with a conventional high pressure washer, using a volume of water of 10 litre/m².

Thereafter, the plate was rubbed extensively with acetone to remove all the rests of the cleaner composition and other organic compounds.

Finally, the plate was rinsed with water and dried with
5 pressurised air at room temperature until the plate surface seems visually dry.

Example 3

10

The same procedure as mentioned in example 1 was repeated, however after the cleaning step a refreshing step was introduced. The following cleaning/refreshing procedure was used:

10 ml/m² of an emulsion of 10% W/W D-limonene (commercially
15 available from Fluka) in water was sprayed, using a manual pressure sprayer commercially available from Premal Sprayer Devision of Precision Valve Corporation, New York.

After a time lapse of 30 s during which the cleaning liquid was allowed to interact with the coating, the plate was cleaned with a
20 conventional high pressure washer, using a volume of water of 10 litre/m².

Thereafter, 10 ml/m² of a 10% W/W solution of citric acid in water was sprayed onto the cleaned plate. After 10s the plate was rinsed with water and dried with pressurised air at room temperature
25 until the plate surface seems visually dry.

Example 4

The same procedure as mentioned in example 3 was repeated,
30 however a 8.5% W/W solution of phosphoric acid in water was used in the refreshing step.

Example 5

35 The same procedure as mentioned in example 4 was repeated, however after the refreshing step the plate was rinsed intensively with distilled water.

Example 6

The same procedure as mentioned in example 3 was repeated, however a 1.5% W/W solution of Glascol E15 (polyacrylic acid commercially available from N.V. Allied Colloids) was used in the refreshing step.

Example 7

The same procedure as mentioned in example 3 was repeated, however a 3% W/W solution of sodium methasilicate (commercially available from Sigma-Aldrich) was used in the refreshing step.

Example 8

The same procedure as mentioned in example 3 was repeated, however a 9% W/W dispersion of Syton X30 (colloidal silica commercially available from DuPont) in water was used in the refreshing step.

Results

After the first clean/refresh cycle mentioned in the examples, the clean quality was observed. For all examples, visually perfectly cleaned materials were obtained. For all the examples, a very good print quality, more specifically in respect to staining behaviour, was observed. After the second clean/refresh cycle, the presence of ghost images is evaluated (see table 1). High values indicate a high amount of ghost images.

Table 1: Ghosting level

Example	Presence of ghost images
1	5
2	4
3	1
4	0
5	0
6	1
7	0

8	1
---	---


THIS PAGE BLANK (USPTO)

EPO - DG 1
07.12.2000

(40)

[CLAIMS]

1. Direct-to-plate method of lithographic printing with a reusable
5 substrate having a hydrophilic surface comprising the steps of:
(a) making a negative-working imaging layer by coating on the
hydrophilic surface a solution comprising hydrophobic
thermoplastic particles;
(b) making a printing master having ink-accepting areas by image-
10 wise exposing the imaging layer to heat or light;
(c) applying ink and fountain solution to the printing master;
(d) removing the ink-accepting areas from the printing master by
supplying a cleaning liquid to the imaging layer thereby
obtaining a recycled substrate and
15 (e) treating the recycled substrate by supplying an aqueous
solution having a pH<7.
2. Method according to claim 1 wherein the negative-working imaging
layer comprises a hydrophilic binder.
3. Method according to claims 1 or 2 wherein the aqueous solution
20 having a pH<7 comprises a compound according to formula I:



wherein X is OH, O⁻ or a polymer backbone.

4. Method according to claim 3 wherein the compound according to
25 formula (I) is phosphoric acid or a phosphate salt.
5. Method according to any of the preceding claims wherein during
step (d) the printing master is treated by mechanical means such
as a cloth, a rotating brush or by jetting water or a volatile
medium.

6. Method according to any of the preceding claims wherein the reusable substrate is a plate cylinder of a rotary press or a plate or sleeve mounted on a plate cylinder of a rotary press.
- 5 7. Method according to any of the preceding claims wherein the solution, the cleaning liquid or the refreshing liquid is sprayed or jetted onto the substrate.

07.12.2000 - 1 -

[ABSTRACT]

(40)

TITLE: Method of lithographic printing with a reusable substrate.

5 A method for removing ink-accepting areas of a lithographic printing master is disclosed which enables to recycle the lithographic substrate of the printing master. The method comprises after a cleaning step a treatment of the recycled substrate with an aqueous solution having a pH<7.

10

15

THIS PAGE BLANK (USPTO)